



U-TAH Universal 250 ML Cartridge


**IMPORTANT INSTRUCTIONS
PLEASE READ BEFORE USE**

CARTRIDGE SHOULD BE KEPT AT 70° F+ FOR BEST

INSTRUCTIONS FOR USING CARTRIDGE UNIT


1

SHAKE WELL
BEFORE USE
(45 seconds +)



Unscrew Cap
Pull Plug Off

Allow cartridge to sit upright for several minutes to de-air.

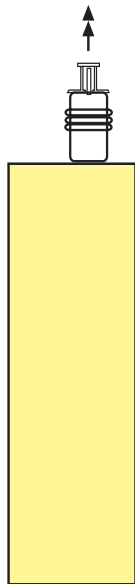

2


Insert Flow Restrictor into Top Ports.

Place Static Mixer Onto Cartridge Neck and Secure Tightly with Lock Nut




3

Pull Back Gun Piston and Securely Load Cartridge in Cradle

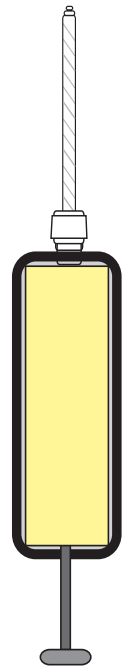

4

Hold Gun Straight Up at a 90° Angle and Slowly Pull Trigger to Purge Air from Unit. Drive Material to Top of Mixer.




90° !!



5

After Material Reaches Top of Static Mixer Tilt Gun Down and Squeeze the First 3-4 Shots of Material into a Disposable Cup, Etc. until color appears consistent.

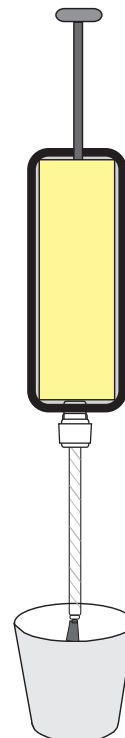

Gun Should Remain Pointed Down Throughout Dispensing of Cartridge. **DO NOT POINT GUN STRAIGHT BACK UP UNTIL DISPENSING IS COMPLETE** As Material May Run Back Into Cartridge And Some Material May Not Cure Properly!